



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 30 September 2003






# Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ



1. Your reference

DY3037

2. Patent application number

(if you know it)

0225932.3

6 NOV 2002

3. Full name of the or of each applicant

ROLLS-ROYCE PLC

4. Title of the invention

MOUNTING ARRANGEMENT

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent

BY VIRTUE OF SECTION 39(1)(a) OF THE PATENTS ACT 1977

6. How many, if any, additional Patents Forms 7/77 are attached to this form?

1

(see note (c))

7.

I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature

Date

M A GUNN

5.11.2002

8. Name and daytime telephone number of person to contact in the United Kingdom

K A WHITE

01332 249452

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

EWAN FERGUS THOMPSON  
10 WYSTAN COURT  
REPTON  
DERBY  
DE65 6SA

Patents ADP number (if you know it): 7733686002

Patents ADP number (if you know it):

Reminder

Have you signed the form?

Patents ADP number (if you know it):



177


477\*97#\*997Y7#7=057  
07NOV02 E761573-1 000370  
P01/7700 0.00-0225932.3

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



1. Your reference

DY3037

2. Patent application number

(The Patent Office will fill in this part)

0225932.3

- 6 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ROLLS-ROYCE PLC  
65 BUCKINGHAM GATE  
LONDON  
SW1E 6AT

Patents ADP number (if you know it)

3970332

If the applicant is a corporate body, give the country/state of its incorporation

ENGLAND

4. Title of the invention

MOUNTING ARRANGEMENT

5. Name of your agent (if you have one)

M A GUNN

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

ROLLS-ROYCE plc  
PATENTS DEPARTMENT  
PO BOX 31  
DERBY  
DE24 8BJ

Patents ADP number (if you know it)

3962001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

OFFICIAL - PATENT 1/77

Continuation sheets of this form

Description

6

Claim(s)

3

Abstract

1

Drawing(s)

2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

2

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

Any other documents (please specify)

DEPOSIT ACCOUNT FEE SHEET

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

M A GUNN

5.11.2002

12. Name and daytime telephone number of person to contact in the United Kingdom

K A WHITE

01332 249452

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Mounting Arrangement

This invention relates to mounting arrangements for  
5 mounting an engine to a vehicle. More particularly, but  
not exclusively, the invention relates to mounting  
arrangements for mounting gas turbine engines to an  
aircraft.

Arrangements for mounting gas turbine engines on  
10 aircraft are required to be such that they will minimise  
stresses and deflections and, such that, in doing so will  
enable the engine to be as light as possible.

According to one aspect of this invention, there is  
provided a mounting arrangement for mounting to a vehicle  
15 an engine having a core assembly and an outer component,  
the mounting arrangement comprising connecting means  
constructed to extend from the core assembly through the  
outer component to the vehicle, and the mounting  
arrangement further comprising transmission means extending  
20 from the connecting means to transmit thrust from the  
engine to the vehicle.

Preferably, the connecting means comprises a strut  
arrangement and attaching means, the strut arrangement  
being for connecting the attaching means to the core  
25 assembly, and the attaching means being for attaching the  
strut arrangement to the vehicle.

Preferably, the engine is a gas turbine engine, for  
example, a three shaft gas turbine engine. The outer  
component may be a housing surrounding the core assembly,  
30 such as a fan case or bypass duct.

The attaching means may comprise a shaft or may  
comprise pivoting means to provide said pivotal attachment.  
The pivoting means may comprise a ball joint.

The attaching means may comprise a trunion. The  
35 trunion may comprise a trunion pin.

The strut arrangement may comprise a frame comprising

a pair of elongate connecting struts joined to each other at one end of each connecting strut to form an apex region. Said apex portion is desirably connected to the attachment means. Conveniently, the opposite end of each elongate  
5 connecting strut can be connected to a first region of the engine.

The transmission means may comprise support means to support the connecting means. The support means may comprise an elongate support member having first and second  
10 opposite ends. The first end of the elongate support member is preferably connected to the connecting means. Conveniently, the second end of the elongate support member is connected to a second region of the engine. The support means may be connected to the strut arrangement,  
15 conveniently in the region of the attaching means. Desirably, the support means is attached at said apex portion.

Preferably, the connecting means comprises an A frame. The mounting arrangement may comprise a tripod arrangement  
20 of said elongate members.

The outer component may define an aperture through which the connecting means can extend. In one embodiment, the attaching means may comprise an outwardly extending part of the apex portion which can extend through said  
25 aperture. In another embodiment, the attaching means may comprise a head which can be arranged in said aperture. Sealing means is preferably provided to seal the connection means to the outer component.

Preferably, the mounting arrangement comprises a pair  
30 of said connecting means, arrangeable in spaced relationship to each other about the engine. The connecting means may be arranged opposite each other on the engine. Preferably, the pair of connecting means are arranged at substantially diametrically opposed regions of  
35 the engine.

The mounting arrangement may further comprise a



securing member to further secure the engine to the vehicle. The securing member may be provided rearwardly of the engine and may comprise a link member.

In one embodiment, the mounting arrangement may  
5 comprise carrying means to carry the outer component. The carrying means may comprise a pair of legs which may be joined to each other and to the outer component at a vertex region thereof. The carrying means may comprise a further A frame. The carrying means may be arrangeable on the  
10 engine at a region between the pair of said connection means, conveniently substantially midway therebetween. The carrying means may comprise two of said further A frames, which may be arranged opposite each other on the engine, conveniently diametrically opposite each other.  
15 Preferably, the further A frames are arranged respectively on an upper region and on a lower region of the engine.

According to another aspect of this invention, there is provided a gas turbine engine comprising a core assembly and an outer component, and a mounting arrangement as  
20 described above for mounting the engine to a vehicle.

An embodiment of the invention will now be described by way of example only, with reference to the accompanying drawings, in which:

Fig. 1 is a diagrammatic side view of a gas turbine  
25 engine;

Fig. 2 is a part sectional top view of the engine shown in Fig. 1;

Fig. 3 is a view of the region marked III in Fig. 2;  
and

30 Fig. 4 is a front schematic view of the engine shown in Fig. 1.

Referring to Fig. 1, there is shown a three shaft gas turbine engine 10. The engine 10 comprises a fan 12 and core assembly 14. The fan 12 has a plurality of blades  
35 which have been omitted from the drawings for clarity. Downstream of the fan 12 in the core assembly 14 there is

provided a compressor arrangement 16 comprising intermediate and high pressure compressors which successively compress the air passing through the core assembly 14.

5 The core assembly 14 also includes a combustion arrangement 18 and a turbine arrangement 20. The combustion arrangement 18 is provided downstream of the compressor arrangement 16 to combust the compressed air with fuel. The hot combustion products exit the combustion  
10 arrangement 18 and expand through the turbine arrangement 20. The turbine arrangement 20 comprises a high pressure turbine, an intermediate pressure turbine and a low pressure turbine. Air passing out of the low pressure turbine is exhausted from the rear of the engine over an  
15 exhaust cone 21.

The core assembly 14 also comprises a casing 22 which surrounds the compressor arrangement 16, the combustion arrangement 18 and the turbine arrangement 20. The casing 22 includes an intermediate casing 38 surrounding the  
20 central region of the core assembly 14. The intermediate casing 38 is a static part of the engine 10 which, in the embodiment shown, surrounds the compressor arrangement 16 and provides structural support for other parts of the engine 10.

25 An outer component in the form of a housing 24 for the fan 12 extends around the front region of the core 14 of the engine 10.

In order to mount the engine on an aeroplane, a mounting arrangement 26 is provided which comprises a pair  
30 of connecting means 28, 30. Each connecting means 28, 30 comprises strut arrangements in the form of an A frame 32 comprising a pair of elongate struts 34, 36, one end of each of which is mounted on the intermediate casing 38. The two elongate struts 34, 36 are joined together at their  
35 opposite ends to form an apex region 40.

At the front of the engine 10, there is provided a

front bearing housing 42. Transmission means, in the form of an elongate support member 41, extends from the apex region 40 to the front bearing housing 42 of the engine 10 to form a tripod arrangement.

5       Attaching means in the form of a shaft or trunion pin 44 extends radially outwardly from the apex region 40 of each connection means 28, 30 through an aperture 46 in the housing 24. The trunion pin 44 extends through a bore 45 in a ball 48. The ball 48 is rotatably held with a race  
10 50, which is attached to the vehicle, a portion of which 51 is shown. Thus, rotation of the pin 44 in the bore 45 and rotation of the ball within the race 50 are permitted. The race 50 is connected directly to a pylon (shown schematically and designated 51) which attaches the engine  
15 to the aircraft. Sealing means 49 is provided in the aperture 46 to seal the trunion pin 44 to the housing 24. There is negligible force transmission through the sealing means 49 to the housing 24. The sealing means 49 is provided to prevent leakage of air through the aperture 46.

20       The two connecting means 28, 30 are arranged diametrically opposite each other on the casing 22 of the core 14 at the horizontal water line of the engine 10.

At the rear of the core assembly 14 of the engine 10, there is provided a tail bearing housing 50. Securing  
25 means in the form of a rear mount link 52 is attached to the tail bearing housing 50 to secure the rear of the engine 10 to the pylon for attaching the engine 10 to the aircraft.

The housing 24 is secured to the casing 22 of the core  
30 14 of the engine 10 by fan outlet guide vanes 54 and also by carrying means in the form of a pair of A frames 56, 58. The A frames 56, 58 comprise a pair of elongate legs 60, 62, each having an end attached in spaced relation to each other to the core assembly 14 at the region of the  
35 intercase 38. The opposite ends of the legs 60, 62 meet at respective vertex regions 64 which are provided at top dead

centre and bottom dead centre of the housing 24.

Thus, there is described a means of attaching a gas turbine engine 10 to an aircraft in which the engine 10 is mounted via the core 14 of the engine 10 through the engine housing 24 so that the engine housing 24 is not part of the connection arrangement.

Various modifications can be made without departing from the scope of the invention.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

**Claims:-**

1. A mounting arrangement for mounting to a vehicle an engine having a core assembly and an outer component, the  
5 mounting arrangement comprising connecting means constructed to extend from the core assembly through the outer component to the vehicle, wherein the mounting arrangement further comprises transmission means extending from the connecting means to transmit thrust from the  
10 engine to the vehicle.
2. A mounting arrangement according to claim 1, wherein the connecting means comprises a strut arrangement and attaching means, the strut arrangement being for connecting the attaching means to the core assembly, and the attaching  
15 means being for attaching the strut arrangement to the vehicle.
3. A mounting arrangement according to claim 2, wherein the attaching means is selected from one or both of a shaft and pivoting means to provide pivotal attachment.
- 20 4. A mounting arrangement according to claim 3, wherein the pivoting means comprises a ball joint.
5. A mounting arrangement according to claim 3 or 4, wherein the attaching means comprises a trunion.
6. A mounting arrangement according to claim 3, 4 or 5,  
25 wherein the connecting means comprises a frame comprising a pair of elongate connecting struts joined to each other at one end of each connecting strut to form an apex portion, the apex portion being connected to the attachment means, and the opposite end of each elongate connecting strut can  
30 be connected to a first region of the engine.
7. A mounting arrangement according to any of claims 3 to 6, wherein the transmission means comprises support means to support the connecting means, the support means comprising an elongate support member having first and  
35 second opposite ends, the first end of the elongate support member being connected to the connecting means, and the

second end of the elongate support member being connected to a second region of the engine.

8. A mounting arrangement according to claim 7, wherein the support means is connected to the strut arrangement in  
5 the region of the attaching means.

9. A mounting arrangement according to claim 8, wherein the support means is connected to the connecting means at said apex region.

10. A mounting arrangement according to any of claims 7 to  
10 9, wherein the connecting means comprises an A frame, and the mounting arrangement comprises a tripod arrangement of the elongate struts and the elongate support member.

11. A mounting arrangement according to claim 8 or 9, wherein the outer component defines an aperture through  
15 which the connecting means can extend, and the apex portion of the first and second connecting struts comprises an outwardly extending part which can extend through said aperture.

12. A mounting arrangement according to claim 8 or 9,  
20 wherein sealing means is provided to seal the connecting means to the outer component.

13. A mounting arrangement according to any preceding claim, wherein the mounting arrangement comprises a pair of said connecting means, arrangeable in spaced relationship  
25 to each other about the engine.

14. A mounting arrangement according to claim 13, wherein the connecting means are arranged opposite each other on the engine.

15. A mounting arrangement according to any preceding  
30 claim, wherein the mounting arrangement further comprises a securing member to further secure the engine to the vehicle, the securing member being provided rearwardly of the engine.

16. A mounting arrangement according to any preceding  
35 claim, wherein the mounting arrangement comprises carrying means to carry the outer component, the carrying means

comprising a pair of legs which are joined to each other and to the outer component at one end of each leg.

17. A mounting arrangement according to claim 16, wherein the opposite ends of the legs are attached to the engine in  
5 spaced relation to each other.

18. A mounting arrangement according to claim 16 when dependent upon any of claims 13 to 15, wherein the carrying means is arrangeable on the engine at a region between the pair of said connection means, substantially midway  
10 therebetween.

19. A mounting arrangement according to any of claims 16 to 18, wherein two of said carrying means are arrangeable opposite each other on the engine.

20. A gas turbine engine comprising a core assembly and an  
15 outer component, and a mounting arrangement according to any preceding claim for mounting the engine to a vehicle.




21. A mounting arrangement substantially as herein described with reference to the accompanying drawings.

22. Any novel subject matter or combination including  
20 novel subject matter disclosed herein, whether or not within the scope of or relating to the same invention as any of the preceding claims.

AbstractMounting Arrangement (Fig. 1)

5        A mounting arrangement (26) is provided for mounting  
an engine (10), typically a gas turbine engine, to a  
vehicle. The mounting arrangement (26) includes connecting  
means (28, 30) constructed to extend from a core assembly  
(14) of the engine (10) through an outer component (24) to  
10 the vehicle. The mounting arrangement (26) also includes  
transmission means (41) extending from the connecting means  
(28, 30) to transmit thrust from the engine (10) to the  
vehicle.



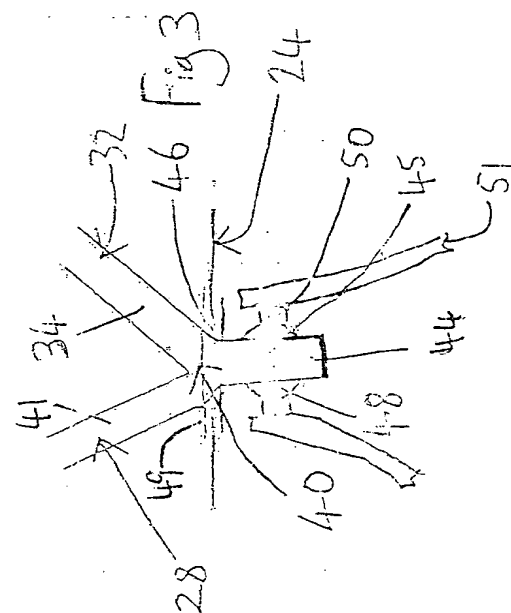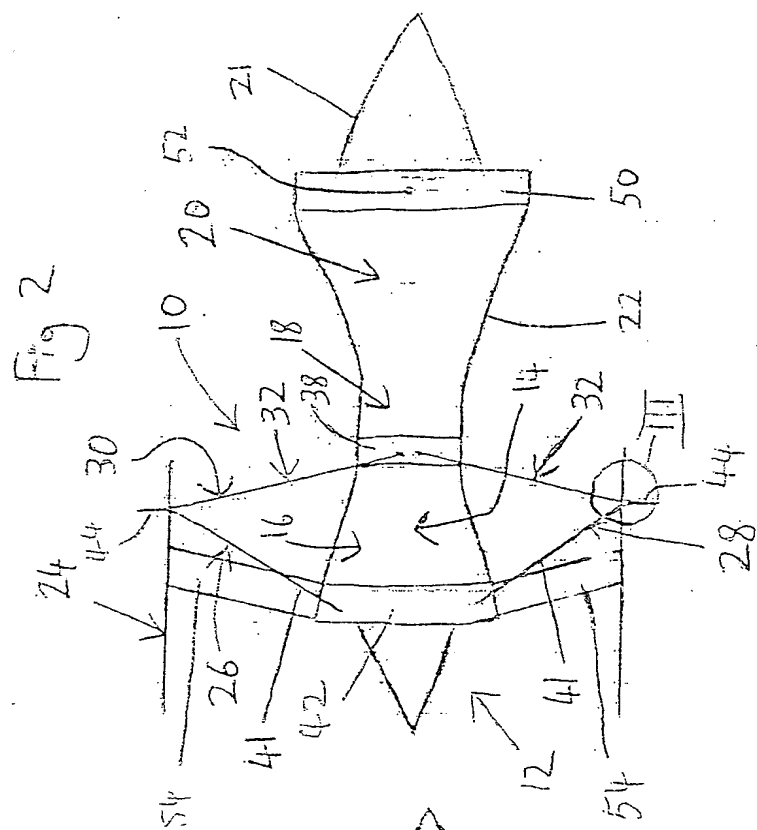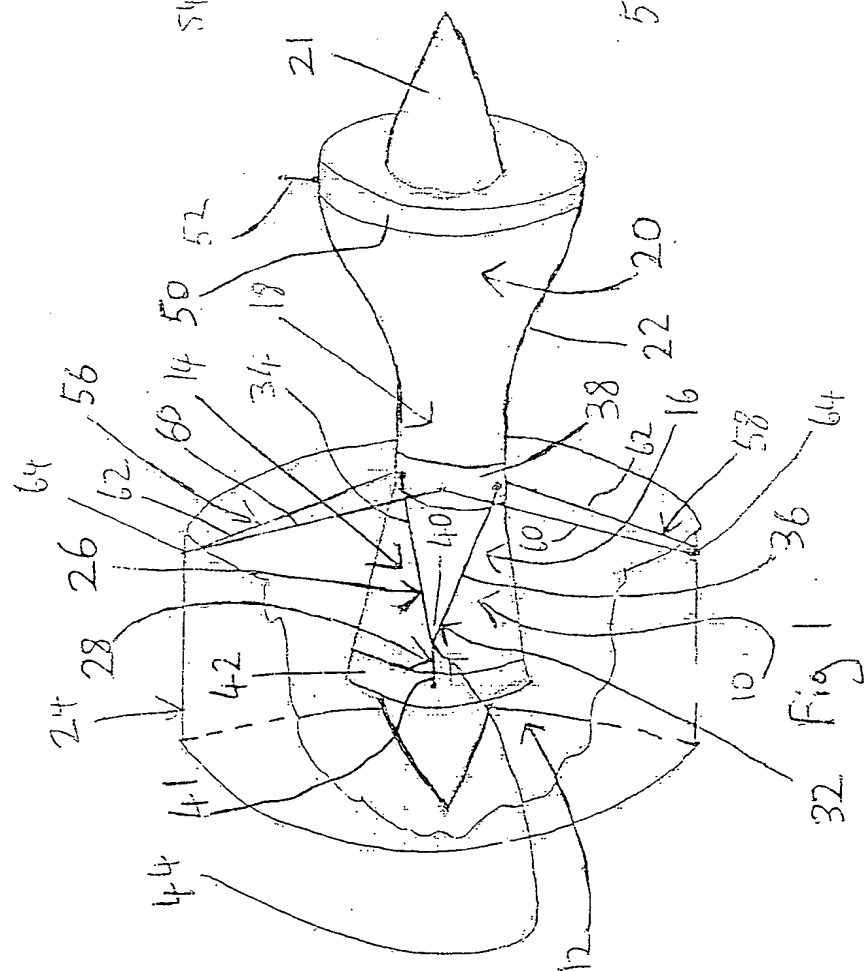



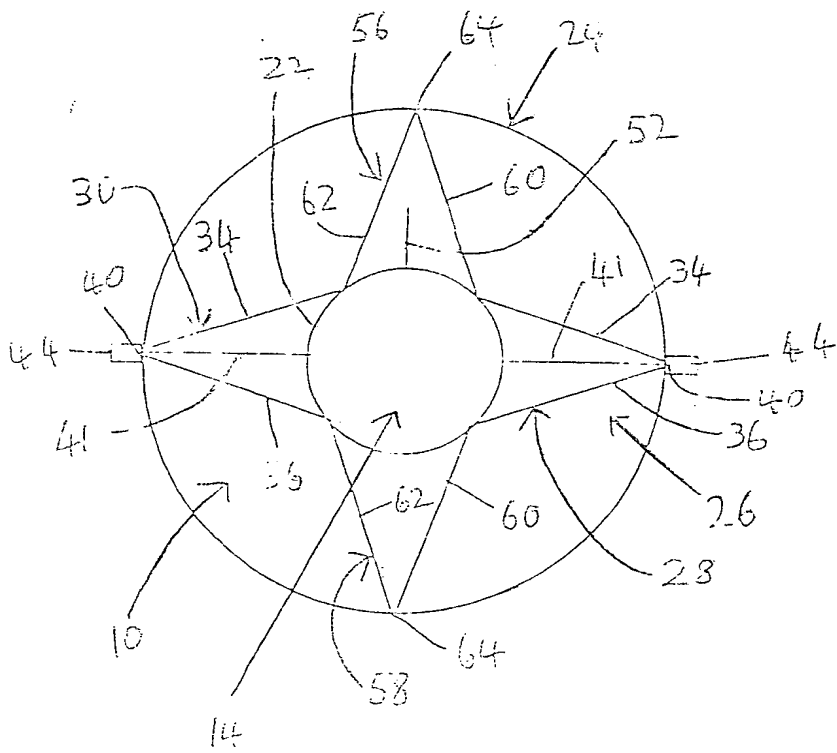


Fig 4

